




THERMOCOUPLE TECHNOLOGY, INC.

Threaded
Tapered
.385" Bore
w/ lag ext.

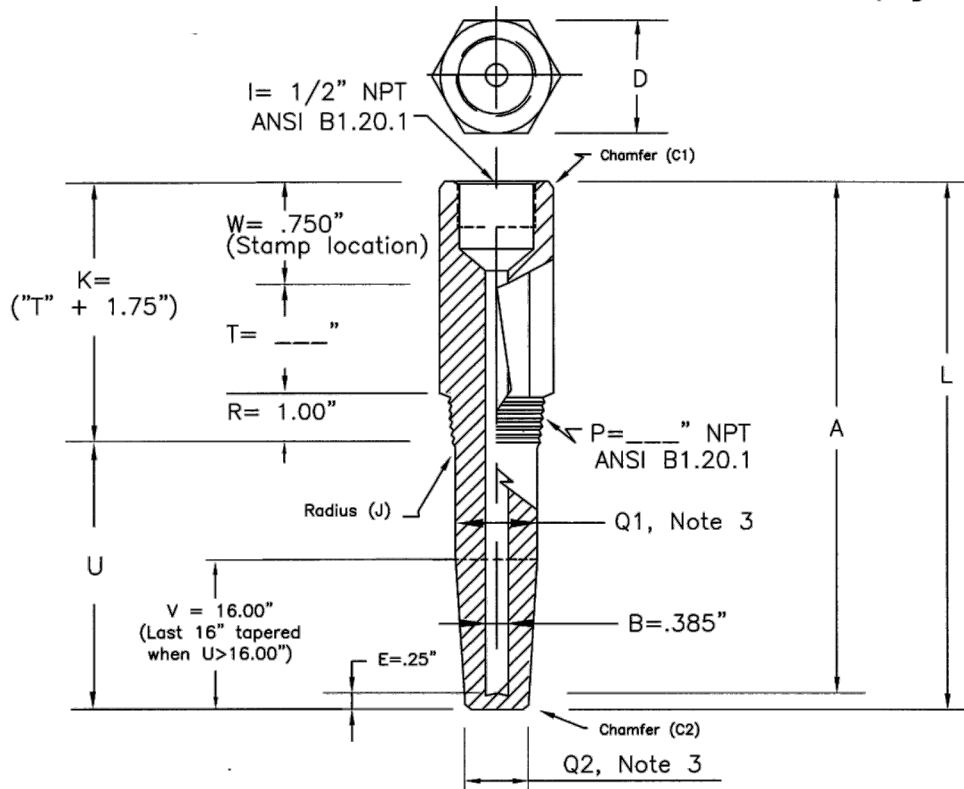

| T 5 0 | <p>1/2" Process Connection Style 10035 Specifications: See Notes 1-4 a. Minimum lag length = .250" and b. "D" = 1-1/8" hex, See Note 2</p> | <p>1. STANDARD BIMET LENGTHS:</p> <table border="1"> <thead> <tr> <th>"A"</th> <th>"U"</th> <th>"T"</th> <th>"L"</th> </tr> </thead> <tbody> <tr> <td>6"</td> <td>2.5</td> <td>2</td> <td>6.25"</td> </tr> <tr> <td>9"</td> <td>4.5</td> <td>3</td> <td>9.25"</td> </tr> <tr> <td>12"</td> <td>7.5</td> <td>3</td> <td>12.25"</td> </tr> <tr> <td>15"</td> <td>10.5</td> <td>3</td> <td>15.25"</td> </tr> <tr> <td>18"</td> <td>13.5</td> <td>3</td> <td>18.25"</td> </tr> <tr> <td>24"</td> <td>19.5</td> <td>3</td> <td>24.25" (Last 16" tapered)</td> </tr> </tbody> </table> <p>2. STANDARD HEX MATERIALS: 304:304/Lss 316:316/Lss CS:CS 1018 BR: Brass a. Other material grades are available only in round bar with (2) wrench flats.</p> <p>3. STANDARD SHANK O.D.s: T50 Q1 = .680", Q2 = .625" T75: Q1 = .875", Q2 = .766" T10: Q1 = 1.062", Q2 = .766"</p> <p>4. TOLERANCES: Reference document: Series T</p> | "A" | "U" | "T" | "L" | 6" | 2.5 | 2 | 6.25" | 9" | 4.5 | 3 | 9.25" | 12" | 7.5 | 3 | 12.25" | 15" | 10.5 | 3 | 15.25" | 18" | 13.5 | 3 | 18.25" | 24" | 19.5 | 3 | 24.25" (Last 16" tapered) |
|-------------|---|--|---------------------------|-------|-----|-----|----|-----|---|-------|----|-----|---|-------|-----|-----|---|--------|-----|------|---|--------|-----|------|---|--------|-----|------|---|---------------------------|
| "A" | "U" | | "T" | "L" | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6" | 2.5 | | 2 | 6.25" | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9" | 4.5 | 3 | 9.25" | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12" | 7.5 | 3 | 12.25" | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15" | 10.5 | 3 | 15.25" | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 18" | 13.5 | 3 | 18.25" | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 24" | 19.5 | 3 | 24.25" (Last 16" tapered) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| T 7 5 | <p>3/4" Process Connection Style 10036 Specifications: See Notes 1-4 "D" = 1-1/8" hex, See Note 2</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| T 1 0 | <p>1" Process Connection Style 10016 Specifications: See Notes 1-4 "D" = 1-3/8" hex, See Note 2</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

STYLES 10035, 10036, 10016

Thermocouple Technology, Inc.
350 New Street
Quakertown, Pa 18951
Phone: 215-529-9394 FAX: 215-529-9397 www.tteconline.com