




THERMOCOUPLE TECHNOLOGY, INC.

Threaded
Straight
.260" Bore

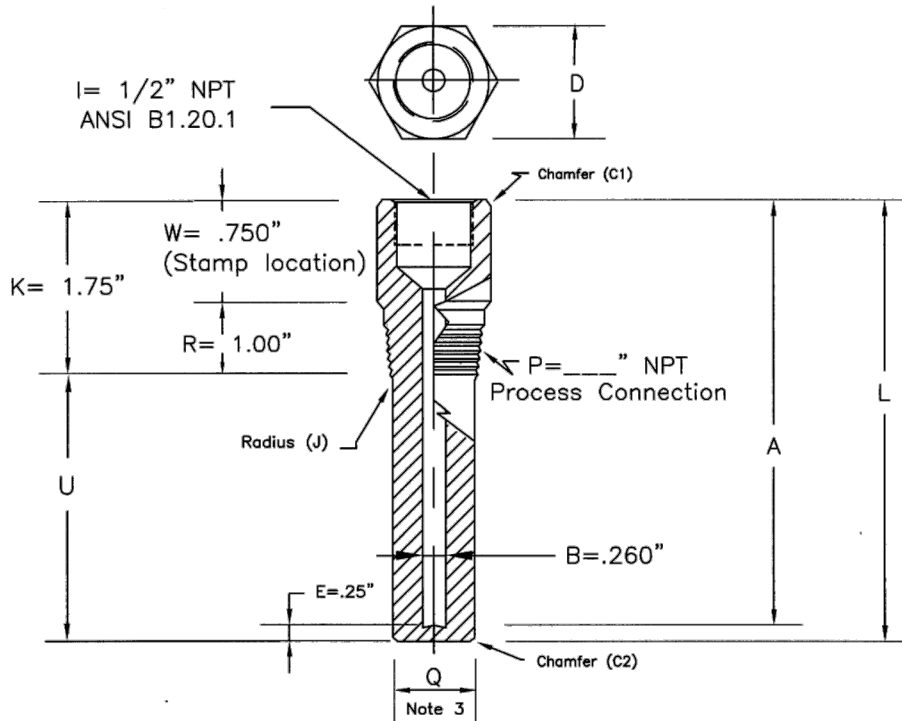

| T 5 0 | <p>1/2" Process Connection Style 10023 Specifications: See Notes 1-4 a. "W" = 1.00", "R" = .750" and b. "D" = 1-1/8" hex, See Note 2</p> | <p>1. STANDARD BIMET LENGTHS:</p> <table border="1"> <thead> <tr> <th>"A"</th> <th>"U"</th> <th>"L"</th> </tr> </thead> <tbody> <tr> <td>2.5"</td> <td>1</td> <td>2.75" See Note 3a.</td> </tr> <tr> <td>2.5"</td> <td>1.625</td> <td>See Limited Space Series</td> </tr> <tr> <td>4"</td> <td>2.5</td> <td>4.25" See Note 3a.</td> </tr> <tr> <td>6"</td> <td>4.5</td> <td>6.25"</td> </tr> <tr> <td>9"</td> <td>7.5</td> <td>9.25"</td> </tr> <tr> <td>12"</td> <td>10.5</td> <td>12.25"</td> </tr> <tr> <td>15"</td> <td>13.5</td> <td>15.25"</td> </tr> <tr> <td>18"</td> <td>16.5</td> <td>18.25"</td> </tr> <tr> <td>24"</td> <td>22.5</td> <td>24.25"</td> </tr> </tbody> </table> <p>2. STANDARD HEX MATERIALS: 304:304/Lss 316:316/Lss CS:CS 1018 BR: Brass a. Other material grades are available only in round bar with (2) wrench flats.</p> <p>3. STANDARD SHANK O.D.s: T50 Q1 = .625" See Note 3a T75: Q1 = .750" See Note 3a T10: Q1 = .875" See Note 3a a.U2.50" & LESS: T50 & T75: Q = .500" T10 Q = .750"</p> <p>4. TOLERANCES: Reference document: Series T</p> | "A" | "U" | "L" | 2.5" | 1 | 2.75" See Note 3a. | 2.5" | 1.625 | See Limited Space Series | 4" | 2.5 | 4.25" See Note 3a. | 6" | 4.5 | 6.25" | 9" | 7.5 | 9.25" | 12" | 10.5 | 12.25" | 15" | 13.5 | 15.25" | 18" | 16.5 | 18.25" | 24" | 22.5 | 24.25" |
|-------------|---|--|--------------------|-----|-----|------|---|--------------------|------|-------|--------------------------|----|-----|--------------------|----|-----|-------|----|-----|-------|-----|------|--------|-----|------|--------|-----|------|--------|-----|------|--------|
| "A" | "U" | | "L" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.5" | 1 | | 2.75" See Note 3a. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.5" | 1.625 | See Limited Space Series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4" | 2.5 | 4.25" See Note 3a. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6" | 4.5 | 6.25" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9" | 7.5 | 9.25" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12" | 10.5 | 12.25" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15" | 13.5 | 15.25" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 18" | 16.5 | 18.25" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 24" | 22.5 | 24.25" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| T 7 5 | <p>3/4" Process Connection Style 10024 Specifications: See Notes 1-4 "D" = 1-1/8" hex, See Note 2</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| T 1 0 | <p>1" Process Connection Style 10025 Specifications: See Notes 1-4 "D" = 1-3/8" hex, See Note 2</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

STYLES 10023, 10024, 10025

Thermocouple Technology, Inc.
350 New Street
Quakertown, Pa 18951
Phone: 215-529-9394 FAX: 215-529-9397 www.tteconline.com